



Flexibore[®] installation accessory

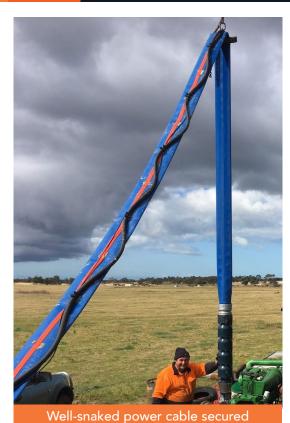

Cable Ties are a quick and easy way to secure your power cable to Flexibore, our flexible rising main. Flexibore is manufactured with a coloured strip that creates cable attachment loops to secure your power cable. Depending on the thickness of the cable, one or two **Cable Ties** are required at each loop.

Cable attachment location:

FB100 all \emptyset = loop attachment point at every 1 m FB250 < 102 mm \emptyset = loop attachment point every 1 m FB250 > 102 mm \emptyset & FB150 all \emptyset = loop attachment point every 0.5 m

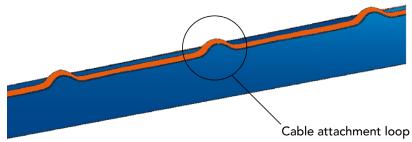

Although **Cable Ties** are best suited to FB100, they are also suitable when securing smaller diameter power cables to FB250 & FB150 to depths of up to 150 metres. Refer to the manual for the best results.



with heavy-duty Cable Ties

Two Cable Ties at every loop





Scan here to learn more

Cable Ties	Flexibore 100		Flexibore 250						Flexibore 150	
Hose diameter (ID)	32 mm	51 mm	40 mm	51 mm	76 mm	102 mm	127 mm	152 mm	203 mm	254 mm
	1.25"	2"	1.5″	2″	3″	4″	5″	6″	8″	10″
Weight/each	0.01 kg		0.01 kg	0.01 kg	0.01 kg	0.01 kg	0.02 kg	0.02 kg	0.02 kg	0.02 kg
Length x width	188 mm x 5 mm		290 mm x 8 mm				511 mm x 12 mm			
Part #	ACF001JEA		ACF002JEB				ACF003JEB			

For the Flexibore warranty to remain valid, only Crusader Hose-approved Cable Ties may be used.

Crusader Hose Pty Ltd

22 Industry Place, Bayswater VIC 3153 Australia e: sales@crusaderhose.com.au p: +61 3 9720 1100 www.crusaderhose.com.au ²⁴⁰⁸ Crusader Hose reserves the right to modify any specification as part of ongoing product development and without prior notice.

Contact Crusader Hose to ensure that the current technical data sheets and documentation are used.



